


Exceptional Grip in Wet and Dry Environments

- Excellent splash protection against a wide range of chemicals
- Approved for use with chemotherapy/cytotoxic drugs
- Neoprene formulation and textured fingertips provides a secure grip
- Polymer coated for easy donning
- Extended cuff offers expanded protection over the wrist and forearm
- Certified to the Emergency Medical Glove Requirements of NFPA 1999

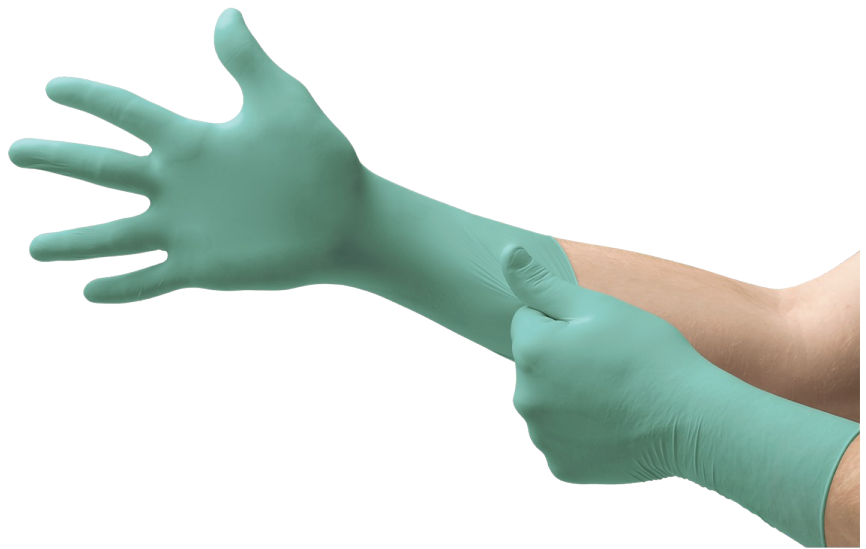

Industries

- Life Sciences
- Chemical
- Healthcare

Recommended For

- Animal care feeding and cleanup
- Maintaining lab furniture and equipment
- Spill or leakage cleanup
- Transferring liquids and solids
- Assembly of parts
- Sample taking and processing
- Administering drugs
- Raw material sample collection
- Testing
- Maintenance
- Tested for use with chemotherapy drugs
- Enhanced grip in wet environments
- Extra protection over the wrist and arm
- Damp donning
- Protection from Type I latex allergy in HCW's or patients
- Higher-risk clinical applications
- Protection from Type I latex allergy in HCW's or patients



TECHNICAL DATA SHEET

PRODUCT INFORMATION

	NeoPro [®] EC NEC-288
Material	Neoprene (Polychloroprene)
Color	Green
Glove Design	Polymer Coated, Powder-Free, Textured Fingers
Cuff	Beaded
Manufacturing/QMS Audit Standards	EN ISO 13485:2012
Regulatory	ASTM D6977, EN 420:2003 + A1:2009, FDA21 CFR 177-2600-US Food Contact Approved, NFPA 1999:2018, US QSR/FDA 510(k) Medical Examination Grade
Packaging	50 gloves per dispenser 10 dispensers per case 500 gloves per case
Storage	Keep out of direct sunlight; store in a cool and dry place. Keep away from sources of ozone or ignition.
Country of Origin	Indonesia
User Needs Segment	High Risk
Available sizes	S (6.5 - 7), M (7.5 - 8), L (8.5 - 9), XL (9.5 - 10), XXL (10.5 - 11)
Anti-static	Yes

PHYSICAL PROPERTIES

	Typical Values		Testing Method
Length (mm/inches)	290 / 11.4		ASTM D3767,EN 420
Freedom from Holes (Inspection level I)	1.5 AQL		ASTM D5151,EN 455-1
Palm Thickness (mm/mils)	0.16 / 6.3		ASTM D3767,EN 420
Finger Thickness (mm/mils)	0.21 / 8.3		ASTM D3767,EN 420
	BEFORE AGING	AFTER AGING	
Ultimate Tensile Strength (MPa)	24	20	ASTM D412 & D573
Elongation at Break (%)	≥ 500	≥ 500	ASTM D412

ORDERING INFORMATION

Size	S (6.5 - 7)	M (7.5 - 8)	L (8.5 - 9)	XL (9.5 - 10)	XXL (10.5 - 11)
Product Code	NEC-288-S	NEC-288-M	NEC-288-L	NEC-288-XL	NEC-288-XXL

For additional information visit us at www.ansell.com, or call us at

Europe, Middle East & Africa Region

Ansell Healthcare Europe NV
T: +32 (0) 2 528 74 00
F: +32 (0) 2 528 74 01

Asia Pacific Region

Ansell Global Trading Center
(Malaysia) Sdn Bhd
T: +603 8310 6688
F: +603 8310 6699

North America Region

Ansell Healthcare Products LLC
T: +1 800 800 0444
F: +1 800 800 0445

Latin America & Caribbean Region

Ansell Commercial Mexico S.A. de C.V.
T: +52 442 248 1544 / 248 3133

Australia

Ansell Limited
T: +61 1800 337 041
F: +61 1800 803 578

Russia

Ansell PYC
Ten. +7 495 258 13 16

Ansell, ® and ™ are trademarks owned by Ansell Limited or one of its affiliates. US Patented and US and non-US Patents Pending:
www.ansell.com/patentmarking © 2022 Ansell Limited. All Rights Reserved.

Neither this document nor any other statement made herein by or on behalf of Ansell should be construed as a warranty of merchantability or that any Ansell product is fit for a particular purpose. Ansell assumes no responsibility for the suitability or adequacy of an end user's selection of gloves for a specific application.